


# 3-PIECE HIGH PRESSURE BALL VALVE

## NA3TPN500 SERIES

### Technical Data

- Full Port
  - With Lever Operation
  - Design: ASME B16.34
  - Valves Inspected & Tested according to API 598 Standard
- Material: S25C  
 Working Pressure: PN500  
 Size Ranging: 3/8"(DN10) only  
 End Connections: DIN2999 / DIN259 / BSPT / NPT

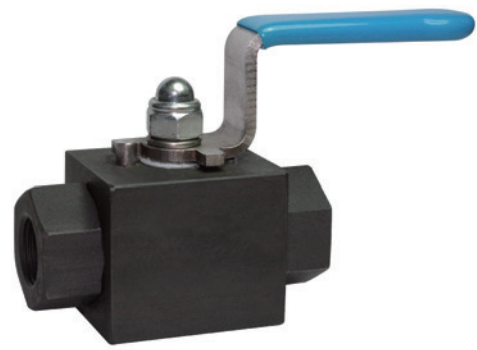


### Dimensions & Material List

SIZE	øD	E	F	H	L	W
3/8"	10	38	38	49.5	73	107

NO.	Description	Qty	Material
1	Body	1	S25C
2	Cap	2	S25C
3	Ball	1	ASTM-A351-CF8
4	Seat	2	Delrin
5	Joint Gasket	2	Viton
6	Stem	1	SUS316
7	Thrust Washer	1	PTFE
8	O-Ring of Stem	1	Viton
9	Stem Packing	1	PTFE
10	Washer	1	SUS304
11	H-Spring Washer	1	SUS304
12	Handle Nut	1	SUS304
13	Handle	1	SUS304
14	Handle Cover	1	Plastic
15	Stop Pin	1	SUS304

### Pressure-Temperature Chart

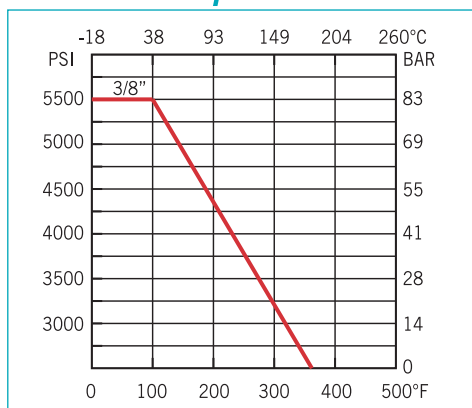

### Ordering Information

NA3TPN500	Code	Body Material
	1	S25C
	Code	Connection Size
	(1) 3/8"	
	Code	End Connection Type
	(A) DIN2999 (B) DIN259 (C) BSPT (D) NPT	
NA3TPN500		
		Complete Ordering Code