

VARIABLE AREA TYPE FLOW METER (ROTAMETER)

NP-TYPE

Operation Principle

The variable area flow meter contains a float & taper tube. The fluid flow through the taper tube and force up the float. The flow rate is measured as a function of the area of the opening. This area is displayed as the float that is free to move to produce the varying area.

Technical Data

A. Measuring The Flow Rate For

- Gases & Liquid
- Chemical process system
- Water treatment system
- Industrial flow system


B. Service Condition

- Viscosity: ≤ 3 cP
- Max. working temperature Metal: 100°C; Plastic: 60°C
- Max. working pressure
 - (1) Body material: NPS: 15 kg/cm², NPI: 15 kg/cm², NPV: 6 kg/cm²
 - (2) Glass tube: Borosilicate glass 6 kg/cm²
 - (3) P.C tube: 10 kg/cm², Instant pressure: 15 kg/cm²

C. Alarm Switch Available (N.O)

- Switch rating: AC 125V 0.5A / DC 100V 10W / Max. DC 250V < 40mA

D. Accuracy: $\pm 2.5\%$ F.S

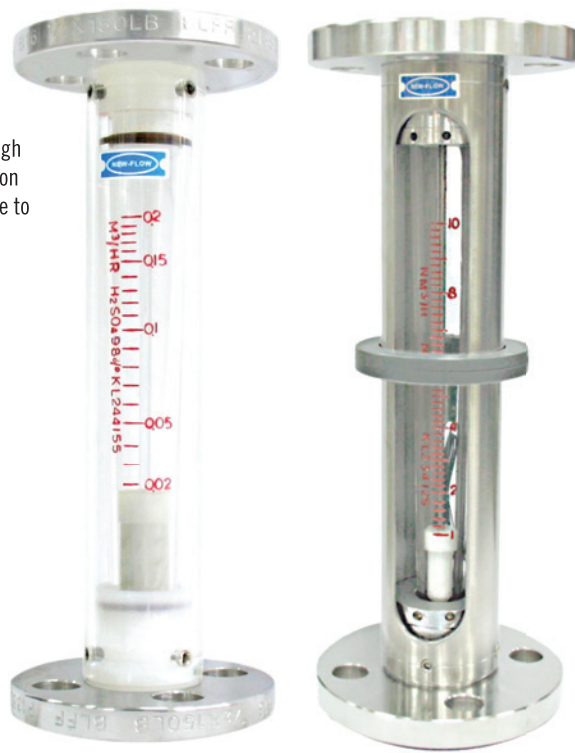


Approvals:



WWW.NEW-FLOW.COM • TEL: 886-7-8135500 • FAX: 886-7-8225588 • Email: info@new-flow.com

Dimensions

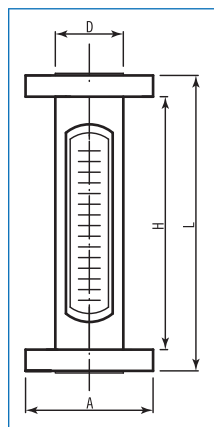

unit=mm

Range Size	H ₂ O (Max.) L/Min	Air (Max.) NL/Min	Dimension				
			Flange	L	H	A	D
10A	0.1~1.0	2~20	3/8"	175	145	-	-
15A	1~10	20~200	1/2"	230	200	-	-
20A	2~20	30~300	3/4"	260	230	-	-
25A	5~50	100~1000	1"	265	230	-	-
32A	10~100	200~2000	1 1/4"	280	245	-	-
40A	20~200	350~3500	1 1/2"	280	245	-	-
50A	40~400	500~5000	2"	285	245	-	-

Ordering Information

NP-Type	Code	Model	Code	Float Material
↓	NPS	Wetted parts are stainless steel	↓	(1) SS304 (2) SS316 (3) P.V.C (4) P.P.
	NPI	Wetted parts are steel		(5) PVDF (6) Teflon (0) option
	NPV	Wetted parts are plastic		Code Seal Material
	Code Size	(1) 10A (2) 15A (3) 20A (4) 25A (5) 32A (6) 40A (7) 50A		(1) NBR (2) Viton
	Code Connection Rating	(1) JIS 5K (2) JIS 10K (3) ANSI 150# (4) DIN PN10		Code Protection Supporter Material
	Code Body Material	(1) SS304 (2) SS316 (3) SS316L (4) P.V.C (5) P.P (6) PVDF (7) Option		(1) SS304 (2) SS316 (3) Acrylic Plastic
	Code Indicating Tube Material	(1) Borosilicate glass (2) PC		Code Flow Range
				L 0.1~400 L/min for liquid
				G 2~5000 NL/min for gases
				Code Alarm Switch
		1R One setting point		
		2R Two setting point		
		0 Without alarm		
NP-Type			+	